


# **Raychem** HWAT- L-M-R

## SELF-REGULATING HEATING CABLES FOR HOT WATER TEMPERATURE MAINTENANCE

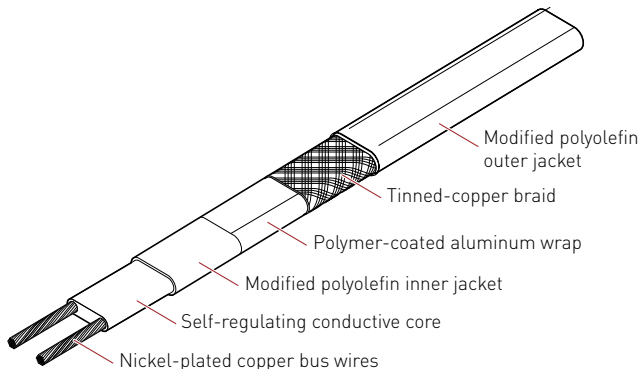

The HWAT self-regulating heating cables maintain the desired water temperature in a building's hot water distribution pipe network.

Positioned on the pipe underneath the insulation, the cables automatically compensate for pipe heat losses where they occur, thereby providing continuous, energy efficient, hot water temperature maintenance.

The HWAT system can be used to eliminate the re-circulation system altogether or to help optimise its performance, in a hybrid approach.

In a hybrid system, recirculation loops are used on the long central pipe runs, with HWAT cables installed on all branch run outs.

Either way, a much improved solution when compared to re-circulation systems.

### KEY BENEFITS

#### HWAT SYSTEM

- Improves delivery of instant hot water at the tap, compared to re-circulation systems
- Environmentally friendly, with significant energy and water savings
- Simple to design and flexible, quick and easy to install
- No need for return pipe work, re-circulation pumps, balancing valves or complex commissioning
- Effective operation, less maintenance, improved hygiene
- Prevention of bacterial proliferation, with
  - Water maintained at a specific temperature level
  - No return pipework and no return of cool water into the water heater
  - Thermal shock capability (HWAT R only)
- Advanced control & monitoring, maximum energy savings
- Space saving
- Well established, worldwide

#### HWAT SELF REGULATING CABLES

- Pentair has more than 40 years experience in producing self-regulating heating cables and is ISO-9001 registered
- Designed and qualified specifically for use on hot water systems
- Tested and approved to IEC 62395 and IEEE 515.1
- Energy efficient
- Radiation cross-linked, to ensure long life expectancy
- Proven useful lifetime in excess of 40 years
- 10 year warranty
- Complete range for all building types :
  - HWAT-L for smaller projects ( single family houses, flats)
  - HWAT-M for apartments and offices
  - HWAT-R for hotels, hospitals, convalescent homes
- Aluminum foil layer to protect the self-regulating core from chemical ingress

## TECHNICAL DATA

	HWAT-L	HWAT-M	HWAT-R
PCN	258015-000	498639-000	266435-000

### CONSTRUCTION

Inner/outer jacket	Modified polyolefin	Modified polyolefin	Modified polyolefin
Outer jacket colour	Yellow	Orange	Red
Braid	Tinned copper	Tinned copper	Tinned copper
Aluminium foil layer	Yes	Yes	Yes
Bus wires	16 AWG nickel-plated copper	16 AWG nickel-plated copper	16 AWG nickel-plated copper

### PRODUCT DIMENSIONS AND WEIGHT (NOMINAL)

Max. dimensions	13.8 x 6.8	13.7 x 7.6	16.1 x 6.7
Weight	0.12 kg/m	0.12 kg/m	0.14 kg/m




### SPECIFICATIONS

Nominal voltage	230 VAC	230 VAC	230 VAC
Nominal power output	7W/m @ 45°C	9 W/m @ 55°C	12 W/m @ 70°C
Maximum circuit length	180 m	100 m	100 m
Circuit breaker type/size	Type C/max 20A	Type C/max 20A	Type C/max 20A
Braid coverage	80%	80%	80%
Min. bending radius	10 mm	10 mm	10 mm
Max. exposure temperature	65°C	65°C	85°C
Max. exposure temperature (power on)	85°C	85°C	90°C
Legionella thermal shock	No	No	Yes


### COMPATIBLE COMPONENTS AND CONTROLS

Components	Rayclis connection kits	Rayclis connection kits	Rayclis connection kits
Control units	HWAT-T55	ACS-30 HWAT-ECO HWAT-T55	ACS-30 HWAT-ECO HWAT-T55
Approvals / Certifications	BS / ÖVE / VDE / SEV / CSTB / SVGW / DVGW / CE / VDE	BS / ÖVE / VDE / SEV / CSTB / SVGW / DVGW / CE / VDE	BS / ÖVE / VDE / SEV / CSTB / SVGW / DVGW / CE / VDE

## THERMAL OUTPUT RATING

HWAT - R	
HWAT-M	
HWAT-L	

### HEATING CABLE POWER OUTPUT

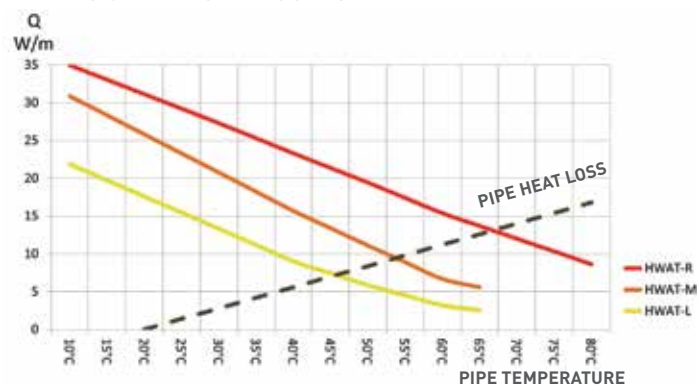

### MAXIMUM CIRCUIT LENGTH IN METERS BASED ON START-UP TEMP +12°C , AC 230 V

	Voltage	Max. circuit length			
Circuit breaker size		10 A	13 A	16 A	20 A
HWAT-L	230 V	80 m	110 m	140 m	180 m
HWAT-M	230 V	50 m	65 m	80 m	100 m
HWAT-R	230 V	50 m	65 m	80 m	100 m

Pentair requires the use of a 30mA residual current device (RCD) to provide a maximum safety and protection from fire. All heating circuits have to be protected by C-type circuit breaker.



[WWW.PENTAIRTHERMAL.COM](http://WWW.PENTAIRTHERMAL.COM)

**UNITED KINGDOM**

Tel: 0800 969 013  
Fax: 0800 968 624  
[salesthermalUK@pentair.com](mailto:salesthermalUK@pentair.com)

**IRELAND**

Tel: 1800 654 241  
Fax: 1800 654 240  
[salesIE@pentair.com](mailto:salesIE@pentair.com)

**AUSTRALIA**

Tel: +61 2 97920250  
Fax: +61 2 97745931  
[sales.thermal@pentair.com](mailto:sales.thermal@pentair.com)

**INDIA - NOIDA**

Tel: +91 120 464 9500  
Fax: +91 120 464 9548  
[PTMinfome@pentair.com](mailto:PTMinfome@pentair.com)

**INDIA - MUMBAI**

Tel: +91 22 6775 8800/01  
Fax: +91 22 2556 1491  
[PTMinfome@pentair.com](mailto:PTMinfome@pentair.com)

**UAE**

Tel: +971 4 378 1700  
Fax: +971 4 378 1777  
[PTMinfome@pentair.com](mailto:PTMinfome@pentair.com)

**SOUTH EAST ASIA**

Tel: +65 67685800  
Fax: +65 67322263  
[sales.thermal@pentair.com](mailto:sales.thermal@pentair.com)

Pentair is owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2015 Pentair.

